


# RADOX® SOLAR cable

Multi core cable – screened

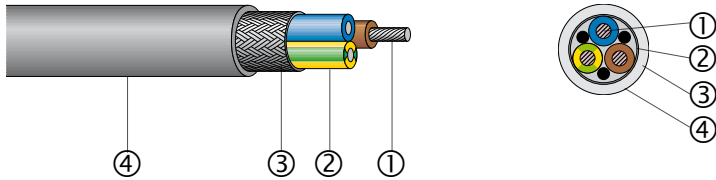

- high resistance against heat, ozone and weatherproof
- extremely mechanically robust, very long lifetime
- halogen free
- space saving, easy to install

## Application

For connecting photovoltaic system components inside and outside of buildings and equipment with high mechanical requirements and extreme weather conditions. For permanent installations.

## Composition of cable

① Conductor	stranded tin plated copper, fine wired, acc. to EN 60228, class 5
② Insulation	RADOX® 125
Colour	2-5 cores acc. to CENELEC, HD 308 S2 (see page 139) as of 6 cores black-numbered with earth conductor yellow-green (other colours on request)
③ Screening	tin plated copper braid
④ Sheat	RADOX® 125
Colour	black

## Technical data

Voltage rating		1000V DC or 600 / 1000V AC
Test voltage		3500V AC
Temperature range	fixed	-40 up to +125 °C
Min. operating temperature	flexing	-25 °C
Max. conductor temperature	(short circuit at max. 5s)	+280 °C
Min. bending radius	fixed	3 x cable-dia.
	flexing	5 x cable-dia.

## RADOX® SOLAR cable

Multi core cable – screened

### Fire tests

Flame propagation:

Vertical of a single cable

EN 50265-2-1, IEC 60332-1

Vertical of bunched cables

EN 50266-2-4, IEC 60332-3-24 Category C

Content of halogen acid gas

EN 50267-2-1, IEC 60754-1 0mg/g

Corrosivity of combustion gases

EN 50267-2-2, IEC 60754-2

Smoke density

EN 50268-2, IEC 61034-2

### Extract from our delivery programme

Cross section mm <sup>2</sup>	Conductor		Core	Screening	Cable	Weight
	Construction nom. n x mm dia.	dia. nom. mm	dia. nom. mm	dia. nom. mm	dia. nom. mm	nom. kg/100 m
2 x 2.5	48 x 0.25	2.05	3.50 ± 0.10	7.7	10.2 ± 0.4	17.5
3 x 2.5	48 x 0.25	2.05	3.50 ± 0.10	8.3	10.8 ± 0.4	20.6
4 x 2.5	48 x 0.25	2.05	3.50 ± 0.10	9.8	12.0 ± 0.4	26.8
5 x 2.5	48 x 0.25	2.05	3.50 ± 0.10	10.4	13.1 ± 0.4	30.9
7 x 2.5	48 x 0.25	2.05	3.50 ± 0.10	13.2	16.3 ± 0.5	45.9
2 x 4.0	56 x 0.30	2.60	4.15 ± 0.15	9.2	11.9 ± 0.4	24.4
4 x 4.0	56 x 0.30	2.60	4.15 ± 0.15	11.2	14.1 ± 0.4	37.1
3 x 6.0	81 x 0.30	3.40	4.95 ± 0.15	11.6	14.5 ± 0.4	38.8
4 x 6.0	81 x 0.30	3.40	4.95 ± 0.15	13.3	16.5 ± 0.5	51.7

Other cross sections and colours on request.